

Technical Specification

HEAT0040.

Stand: 20.09.2018

| | | |
|--------------|--------------------------|-------------|
| Power Output | kVA | 40 |
| Power Output | kW | 36 |
| Voltage | V | 380/400/415 |
| Frequency | Hz | 50/60 |
| Type | Online Tower three-phase | |



Product Specification

UPS systems from HENKELHAUSEN ensure the uninterruptible, highly available and stable power supply of your sensitive infrastructure and devices at the highest technical level.

Quiet operation, high reliability and low maintenance characterize the HEA T series.

The Henkelhausen Tower systems are suitable for small and medium data centers, industrial applications, service cabinets, machine control systems and much more.

32 to 40 external batteries can be connected, which are then programmable via the 5.7-inch multifunction touch display.

Up to six tower units can be connected in parallel, the cable length between the systems can be up to 20 meters.

Special features:

module Design

High frequency on-line double conversion with DPS control

HEA T models <40 kVA with integrated batteries available

6-fold parallel switchable

can be used as a frequency converter

extremely quiet

low maintenance

Technology you can rely on

Henkelhausen designs, builds and installs UPS solutions of all sizes.

For usage in small offices up to the protection of industrial plants and data centers.

All systems consist of quality components and comply with the highest technical classification VFI-SS-111.


The Henkelhausen UPS product range includes one- and three-phase online UPS systems in the power range from 1 kVA to 2.400 kVA.

The systems are available in single, parallel or redundant design. In parallel construction, we realize services well over 2 MVA.

All our UPS Systems are optimally aligned to the current requirements for classification, efficiency and ease of maintenance.

They provide you with a reliable, uninterrupted power supply and protect your sensitive systems from voltage disturbances and fluctuations.

Performance Range

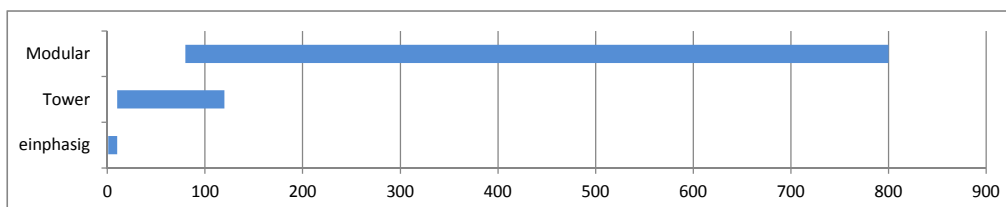

Other Products From Henkelhausen

Combined Heat and Power from Henkelhausen

With a CHP from Henkelhausen you achieve the maximum yield. You benefit from the efficient conversion of natural gas, biogas, sewage gas and weak gases through combined heat and power. Our product range includes CHPs for every application as well as individual complete solutions for entire energy plant.

Emergency Power Supply from Henkelhausen

An emergency power generator from Henkelhausen starts when the public network fails. It provides you with the power you need for your applications reliably and quick. As a full-service provider, we design and implement your system including the engine, control system and the entire periphery. You get a tailored, turnkey solution that ensures your power supply at all times.

Technical Specification

HEAT0040.

Input

| | | |
|--------------------------------|----|-------------|
| Nominal Frequency | Hz | 50/60 |
| Nominal Voltage | V | 380/400/415 |
| Voltage Tolerance | V | 204-520 |
| Total Harmonic Distortion THDI | | <3% |
| Performance Factor | | >99% |

| | | |
|-----------------|----|-------|
| Input Frequency | Hz | 40-70 |
|-----------------|----|-------|

| | | |
|-----------------|--|------------------------------|
| Connection Type | | 3-phase - 5 conductor system |
|-----------------|--|------------------------------|

Output

| | | |
|--------------------------------|----|--------------------------|
| | | 50/60Hz grid synchronous |
| Output Frequency | Hz | +0,1Hz battery operation |
| Nominal Voltage | V | 380/400/415 |
| Voltage Accuracy | | +1% |
| Total Harmonic Distortion THDV | | 5% non linear load |
| Performance Factor | | 0,9 |
| Overload Capacity WR | | 150% 1min. |
| Overload Capacity Bypass | | 500% 100ms. |
| Crest | | 3:1 |
| Switch between Grid - Battery | ms | 1 |

Battery

| | | |
|---------------------|---|--------------------|
| DC Voltage | V | 384-480 selectable |
| Number of Batteries | | 32-40 selectable |
| Charging Current | A | 1-24A selectable |
| internal Batteries | | no |
| external Batteries | | required |

Unit

| | | |
|---------------------------|----|-------|
| Operating Temperature | °C | 0-40 |
| Altitude | | <1500 |
| Sound Pressure at 1 Meter | | <60 |

| | | |
|----------------|--|---|
| Efficiency | | Online operation:<95% ECO operation:<98,5% |
| Parallel Usage | | yes |

Maßangaben:

| | | |
|---------|----|---|
| Module: | | |
| Length | mm | 0 |
| Width | mm | 0 |
| Height | mm | 0 |
| Weight | kg | 0 |

| | | |
|-------------|----|------|
| USV-Cabinet | | ST |
| Length | mm | 600 |
| Width | mm | 800 |
| Height | mm | 1360 |
| Weight | kg | 251 |

Technical Circumstances:

These technical data refer to nominal conditions according to DIN ISO 3046-1

| | | |
|---------------------|--|---------|
| Nominal Conditions: | | |
| Air Pressure Total | | 100 kPa |
| Air Temperature | | 25 °C |
| Relative Humidity | | 30 % |

Power variation at environmental conditions according to DIN ISO 3046-1

All statements made are subject to technical developments, compliance with the technical instructions of Henkelhausen GmbH & Co. KG and reflect the plant at new conditions without pollution.